


# PR 12

External rewinder  
Compa III 10X & Compa V 10X  
Micra 104 & 106  
Spectra II 10X  
Vario III  
Vita II & Vita V

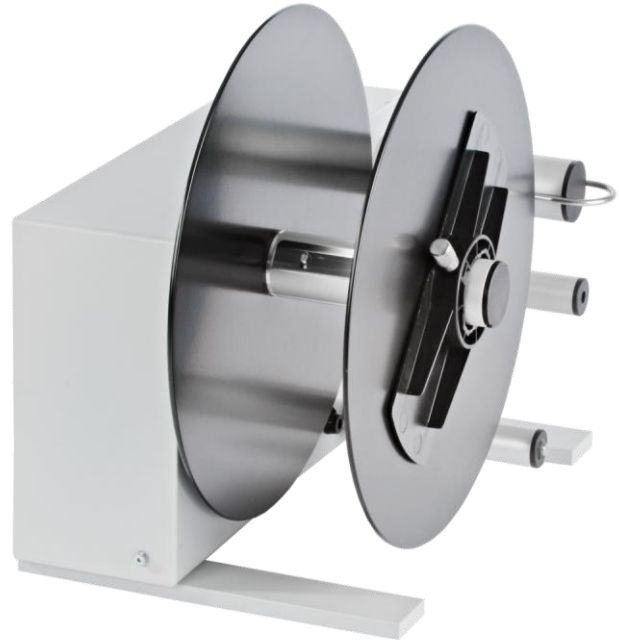

External rewinders are peripheral devices for transfer printers.

At processing of large print orders it is possible to take up large label rolls and to rewind the labels independently from the printer.

For the accurate adjustment of the external rewinders PR 12 and PR 17 to the printer a connection set is offered. The rewinder PR 12 has its own power supply.

## Specifications

<b>Label roll</b>		<b>Weight</b>	6 kg
max. rewind diameter	300 mm	<b>Connection values</b>	
max. label width	120 mm	nominal voltage	110 ... 240 V~ / 50 ... 60 Hz
<b>Label winding</b>	outside/inside	<b>Operating conditions</b>	
<b>Rewind speed</b>	max. 300 mm/s	operating temperature	10 ... 35 °C by air humidity 30 ... 85 % not condensing
<b>Rotating direction</b>	switchable	storage and transport temperature	-20 ... 50 °C by air humidity 10 ... 85 % not condensing
<b>Core diameter</b>	40 mm on cardboard core 40 mm on winder axis 76 mm on cardboard core by adapter (included)	<b>Item no.: 92.52.120</b>	
<b>Dimensions</b>		<b>Item no.: 92.66.090 (optional connection set)</b>	
height x width x depth	350 x 280 x 390 mm		

Subject to change