


# PR 17

External rewinder  
Compa III 162 & Compa V 162  
Spectra II 160 & 162

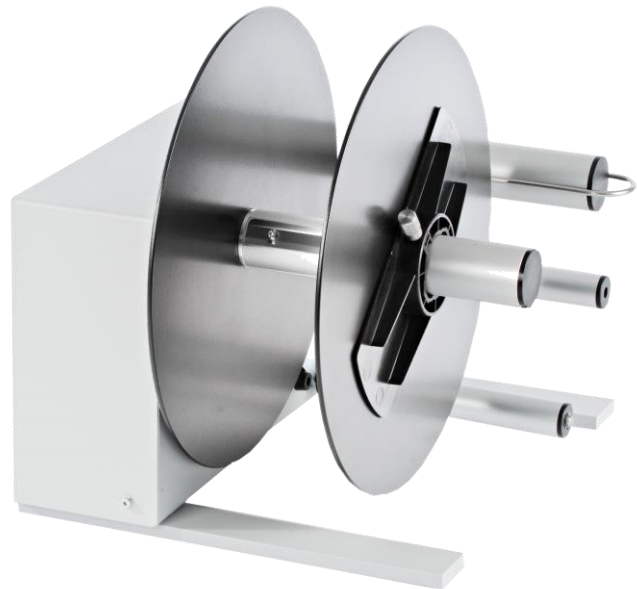

External rewinders are peripheral devices for transfer printers. At processing of large print orders it is possible to take up large label rolls and to rewind the labels independently from the printer.

For the accurate adjustment of the external rewinders PR 12 and PR 17 to the printer a connection set is offered. The rewinder PR 17 has its own power supply.

## Specifications

### Label roll

max. rewind diameter 300 mm

max. label width 180 mm

**Label winding** outside/inside

**Rewind speed** max. 300 mm/s

**Rotating direction** switchable

**Core diameter** 40 mm on cardboard core  
40 mm on winder axis  
76 mm on cardboard core by  
adapter (included)

### Dimensions

height x width x depth 350 x 340 x 390 mm

### Weight

6.3 kg

### Connection values

nominal voltage 110 ... 240 V~ / 50 ... 60 Hz

### Operating conditions

operating temperature 10 ... 35 °C by air humidity  
30 ... 85 % not condensing

storage and transport temperature -20 ... 50 °C by air humidity  
10 ... 85 % not condensing

**Item no.:** 92.52.220

**Item no.:** 92.66.090 (optional connection set)

Subject to change