




Thermal transfer ribbon for Near Edge printers

Excellent printing quality at high speed
Very high resistance to smudge and scratch
Excellent versatility


1716 PREMIUM INLINE PRINT Wax-Resin

Blackness


Macbeth D19C (Optical Density by Reflection)



90° barcode

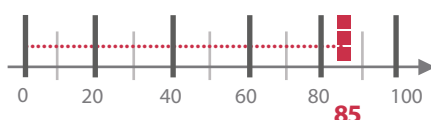


Sharpness



Label compatibility

Vellum paper				PP			
Coated papers				PE			
Glossy coated				PET			


Printing speed

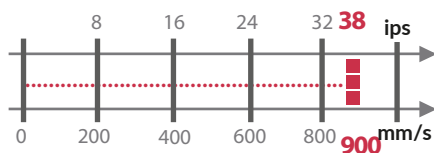


Printhead energy




Smudge resistance

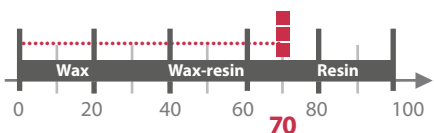

Heat resistance

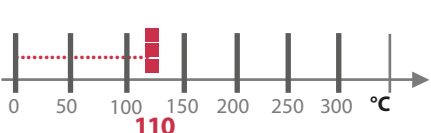

Solvent resistance



RIBBON STRUCTURE

Ink: Wax-Resin
Color: Black
Melting point: 65°C
Ribbon thickness: <7µm
PET film thickness: 4µm

CERTIFICATIONS

REACH/SVHC 1907/2006/EC
EC Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen restrictions

STORAGE CONDITIONS

12 months
Temperature: min 5°C, max 35°C
Humidity: min 20%, max 80%