



Thermal transfer ribbon for Flat Head printers


Excellent printing quality
High resistance
A resin market reference

1721 PREMIUM


Resin AXR7+

Blackness


Macbeth D19C (Optical Density by Reflection)



90° barcode

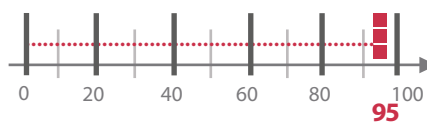


Sharpness

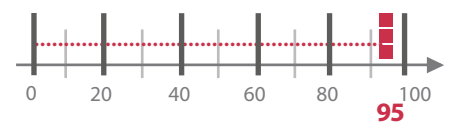


Label compatibility

Coated papers	☒	☒	☒	PP	☒	☒	☒
Glossy coated	☒	☒	☒	PE	☒	☒	☒
	☒	☒	☒	PET	☒	☒	☒


Printing speed

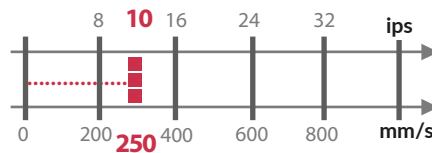


Printhead energy

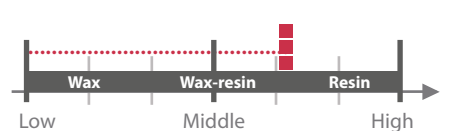


Smudge resistance

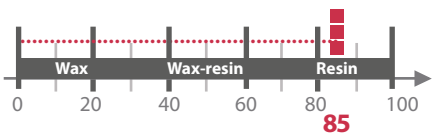

Heat resistance

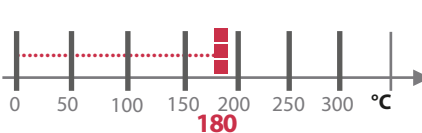

Solvent resistance



RIBBON STRUCTURE

Ink: Resin
Color: Black
Melting point: 80°C
Ribbon thickness: <9µm
PET film thickness: 4,5µm

CERTIFICATIONS

REACH/SVHC 1907/2006/EC
EC Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen restrictions

STORAGE CONDITIONS

12 months
Temperature: min 5°C, max 35°C
Humidity: min 20%, max 80%