




Thermal transfer ribbon for Flat Head printers

Good printing quality
High versatility
Competitiveness


1712 STANDARD Resin

Blackness


Macbeth D19C (Optical Density by Reflection)



90° barcode

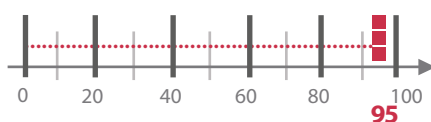


Sharpness




Label compatibility

Coated papers	■	■	■
Glossy coated	■	■	■
PP	■	■	■
PE	■	■	■
PET	■	■	■


Printing speed

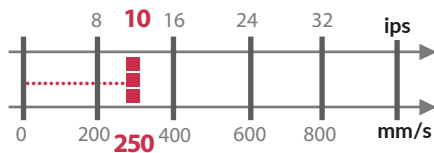


Printhead energy




Smudge resistance



Heat resistance



Solvent resistance



RIBBON STRUCTURE

Ink: Resin
Color: Black
Melting point: 80°C
Ribbon thickness: <9µm
PET film thickness: 4,5µm

CERTIFICATIONS

REACH/SVHC 1907/2006/EC
EC Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65

STORAGE CONDITIONS

12 months
Temperature: min 5°C, max 35°C
Humidity: min 20%, max 80%